
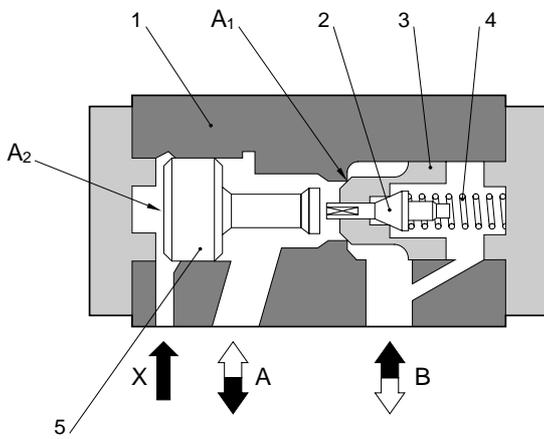



Size 6 to 30 up to 315 bar up to 300 L/min	Check Valve Pilot Operated Type CH, Series 10	Data Sheet C-1002/10.98 GB
--	---	----------------------------------

Features

- ◇ Sub-plate mounting and threaded connection.
- ◇ Shock-free directional control with pre-opening.
- ◇ With or without drain port.
- ◇ Porting pattern to DIN 24 340 Form D, ISO 5781 and CETOP-RP 121 H.

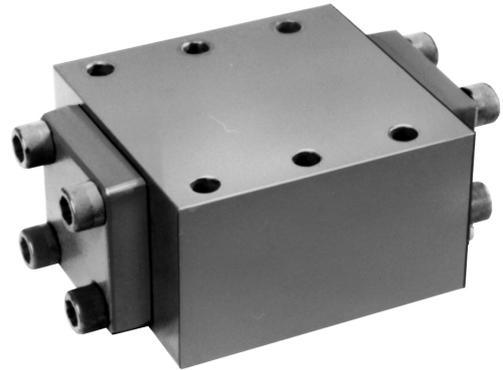

Without Drain Port

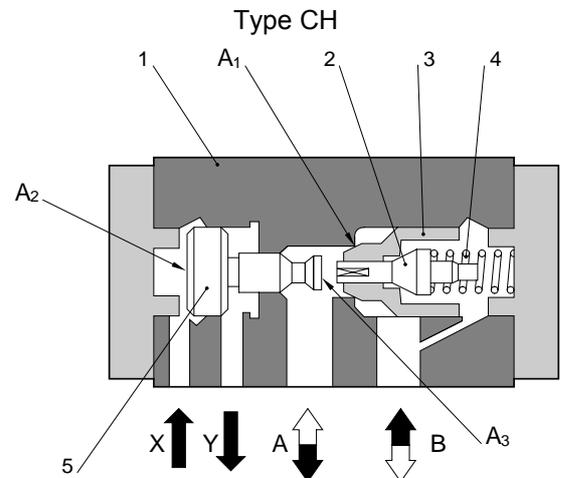

With Drain Port

Functional Description

Type CH Series 10 Check Valves are pilot operated valves that may be hydraulic operated to permit reverse flow. Valves may be supplied with or without drain ports.

These valves are used to isolate a hydraulic circuit under pressure to prevent a load from falling.

The valves comprise a housing (1), a pilot poppet (2), main poppet (3), a spring (4) and a pilot piston (5).

Without Drain Port

Pressure from A to B opens the main poppet (3) with the pilot poppet (2) against the spring (4) enabling the fluid to flow from A to B. Pressure from B to A pushes the main poppet (3) and pilot poppet (2) closed stopping flow from B to A.

Applying pressure to the pilot connection X, moves the pilot piston (5) to the right lifting the pilot poppet (2) first and then the main poppet (3) allowing the fluid to flow from B to A.

To ensure that the valve opens due to pressure applied to the pilot piston, a minimum pilot pressure is required (see precautions in use). Drain port Y is plugged.

With Drain Port

The valve is the same as the description above with the addition of a drain port.

The drain port Y is connected to the valve and annular area of the pilot piston (4) is separated from Port A.

The pressure from port A will now only act on area A₃ of the pilot piston.

Model CH	Page 1.5	Data Sheet C-1002/10.98	
-------------	-------------	----------------------------	---

Ordering Code

CH Y 10 R 10 / 14 V

Check Valve

Drain Line

No code: Without drain port
Y: With drain port

Size

6, 8, 10, 15, 20, 25, 30
(Sub-plate mounting type 10, 20 and 30 only)

Type of Connection/Mounting

G: Threaded Connection (BSP)
P: Sub-plate Mounting

Suitable Oil

No Code: Mineral Oil
V: Phosphate Ester
W: Fatty Acid ester, Water Glycol

Cracking Pressure

Code	Cracking Pressure	Valve Size
10	1.0 bar	15, 20, 25, 30
14	1.4 bar	6, 10

Series Number

10

Technical Data

For applications outside the following parameters, please consult Kawasaki Precision Machinery (UK) Ltd.

Maximum Operating Pressure 315 bar

Pressure Fluid Mineral oil, phosphate ester, fatty acid ester and water glycol.
Phosphate ester is only suitable for use with FPM seals.

Pressure Fluid Temperature Range -20°C to +70°

Viscosity Range 2.8 to 380cSt

Maximum Flow	Type/Size	6	8	10	15	20	25	30
	Without Drain Port	80 L/min			170 L/min		300 L/min	
	With Drain Port	80 L/min			300 (170 L/min for size 20 sub-plate mounting) L/Min			

Degree of Contamination Maximum permissible degree of contamination of the fluid is to NAS 1638 class 9. Kawasaki recommend that a filter with a minimum retention rate of $\beta_{10} \geq 75$ is used.

Cracking Pressure 1.0 bar - size 15, 20, 25, 30
1.4 bar - size 6, 10



Technical Data (continued)

Weight	Type/Size	6	8	10	15	20	25	30
	Without Drain Port	2.5 kg			4kg		8kg	
	With Drain Port	2.5 kg			8 kg (6.5 kg for size 20 sub-plate mounting).			

Installed Position

Optional

Direction of Flow

From A to B, from B to A when pilot operated

Pilot Pressure

Up to 315 bar

Pilot Flow:

Figures below, figures in brackets () are for valve CHY20P.

	Port	Size 6	Size 8	Size 10	Size 15	Size 20	Size 25	Size 30
CH	X	2.2 cm ³	2.2 cm ³	2.2 cm ³	8.7 cm ³	8.7 cm ³	17.5 cm ³	17.5 cm ³
	Y	-	-	-	-	-	-	-
CHY	X	2.2 cm ³	2.2 cm ³	2.2 cm ³	17.5 cm ³	17.5 cm ³ (8.7 cm ³)	17.5 cm ³	17.5 cm ³
	Y	1.9 cm ³	1.9 cm ³	1.9 cm ³	15.8 cm ³	15.8 cm ³ (7.6 cm ³)	15.8 cm ³	15.8 cm ³

Control Areas

Size & Type	A ₁	A ₂	A ₃
CH & CHY 6, 8, 10	1.13 cm ²	3.14 cm ²	0.5 cm ²
CH 15 & 20	3.14 cm ²	9.64 cm ²	-
CHY 20P	3.14 cm ²	9.64 cm ²	1.13 cm ²
CHY 15 & 20G, CH/CHY 25 & 30	5.30 cm ²	15.90 cm ²	1.54 cm ²

Precautions in use

Required pilot pressure for the CH valve:

$$P_{ST} = P_1 \frac{A_1}{A_2} + 5\text{bar} (P_2 = 0)$$






Required pilot pressure for the CHY valve:

$$P_{ST} = \frac{P_1 \times A_1 - P_2 \times (A_1 - A_3)}{A_2} + 5\text{bar}$$



Characteristic Curves


Measured at $v = 36\text{cSt}$ and $t = 50^\circ\text{C}$

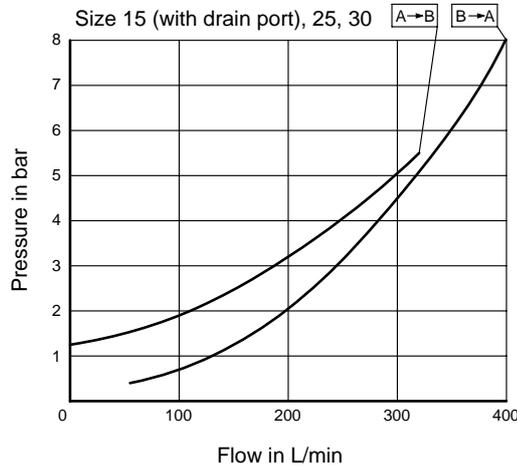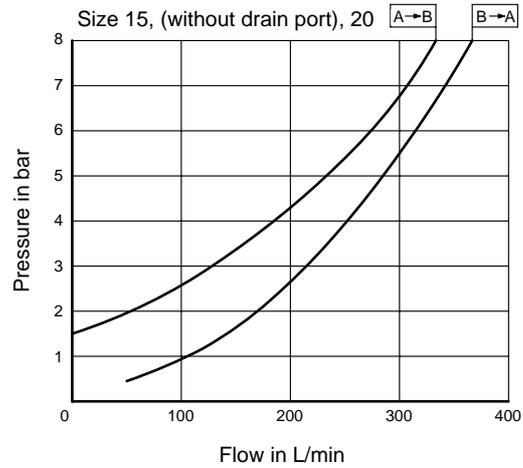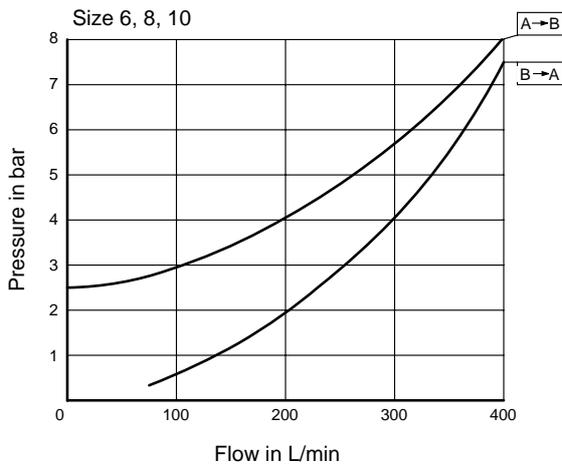


Symbols



Unit Dimensions (dimensions in mm)

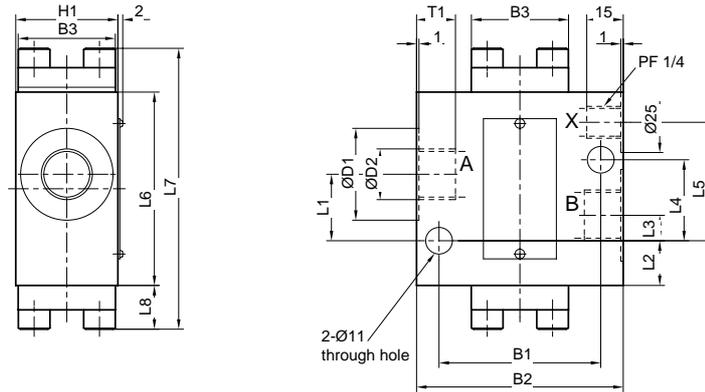

CH*G

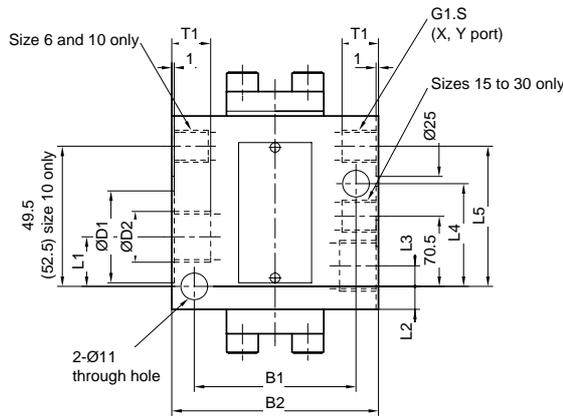

CHY*G

Type	Size	L1	L2	L3	L4	L5	L6	L7	L8	ØD1	ØD2	B1	B2	B3	H1	T1
Without drain port	6									25	G 1/4					
	8	27.5	18.5	10.5	33.5	49	80	116	18	32	G 3/8	66.5	85	40	42	15
	10									38	G 1/2					16
	15									45	G 3/4					17
	20	36.5	17.5	13	50.5	65.5	95	135	20	52	G 1	79.5	100	58	60	18
	25									63	G 1 1/4					
With drain port	6	23.5								25	G 1/4					
	8	19	16.5	12.5	35.5	51	80	116	18	32	G 3/8	66.5	85	40	42	15
	10	19.5	13.5	15.5		54				38	G 1/2					16
	15			20.5						45	G 3/4					17
	20									52	G 1					18
	25	54.5	15.5		84	97.5	125	183	29	63	G 1 1/4	74	120	73	75	
	30			18						65	G 1 1/2					24

KAWASAKI PRECISION MACHINERY (UK) LTD
 Enesettle, Plymouth, Devon, PL5 2SA, England
 Tel: +44 1752 364394 Fax: +44 1752 364816
 E Mail: info@kpm-uk.co.uk

The specified data is for product description purposes only and may not be deemed to be guaranteed unless expressly confirmed in the contract

ALL RIGHTS RESERVED, SUBJECT TO REVISION

Model
CH

Page
5.5

Data Sheet
C-1002/10.98

